


USING THE **Speedy Clean**® RAMP SYSTEM


Proper Handle Position:

The Handles Lay Facing Inside When Trap Is Opened. Make Sure They Remain This Way When Lid Is Closed.

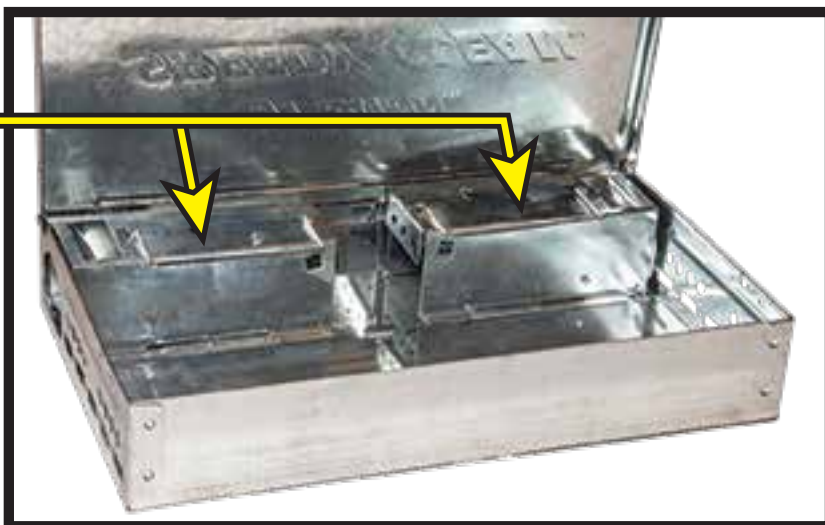


- 1. Damaged Tunnels Are Easily Replaced With New Tunnels. Lift Out Old Tunnel By Pulling Up On The Handles.**
- 2. Place Hole On Bottom Of New Tunnel Over Plastic Block On Trap Base. These Drop On Easily When In The Proper Location.**

1

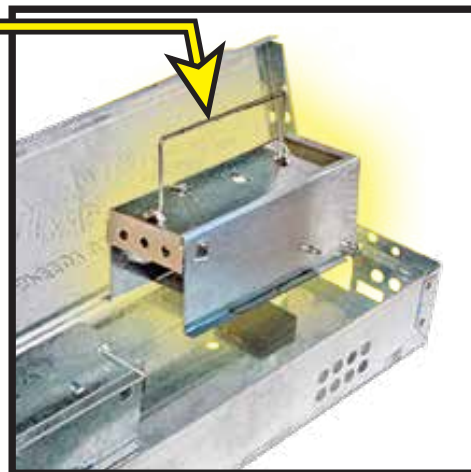

2A

Non-Magnetic Plastic Block
For Ramp Alignment.

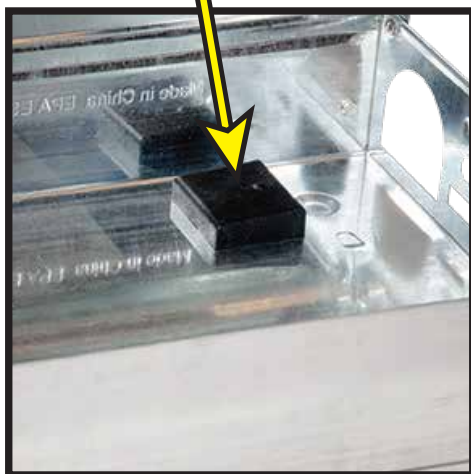

2B

Cut Out Square On Bottom
Of Ramp Unit To Align
Ramp To Plastic Block.



**Tunnel Only Fits One Way. If Inserting New Tunnel Seems Difficult,
Rotate 180°. Do Not Force.**


FAMILY OWNED AND OPERATED

JT EATON™

SINCE 1932

1.800.321.3421

www.jteaton.com

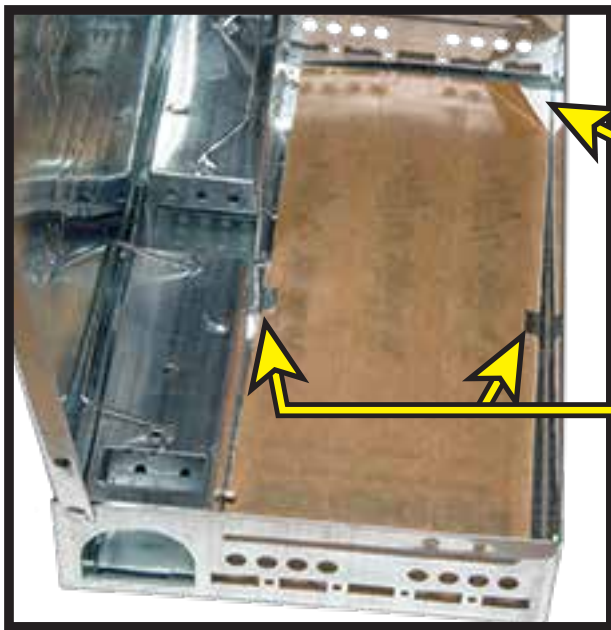

3. **Inserting No. 166 Glue Board After The Ramps Are In Place.**

3A


Folding A Corner Of The Release Paper Before Inserting Makes Removing The Release Paper Easier After Glue Board Is In Place.

3B

Make Sure That The Board Is Secured By The Tabs On The Bottom Of The Trap.

Pressing Down On The No. 166 Glue Board Slides The Board Into The Tabs On The Bottom Of The Trap.

3C

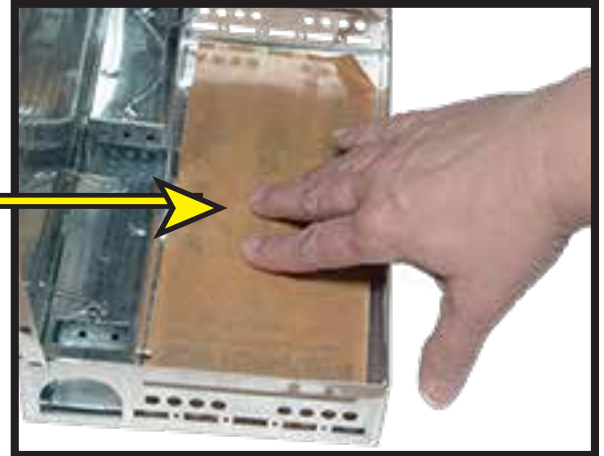

4. **Close Trap And Place In Rodent Areas. Remember To Keep The Handles Facing Toward Inside Of Trap.**



4A

Speedy Clean® Mouse Traps Can Be Secured With Wire Or Nylon Zip Ties.



4B

Repeater™ Models Have Pop-Down Tabs (4) To Raise Trap In Damp Areas.

Speedy Clean® Mouse Traps Can Be Anchored To Hard Surfaces Using The JT EATON™ No. 916 Bait Station Anchor.



THE Speedy Clean® RAMP SYSTEM

Is Available On Both Repeater™ And Little Pete® Style Multiple Catch Mouse Traps



FAMILY OWNED AND OPERATED

JT EATON™
SINCE 1932

1.800.321.3421
www.jteaton.com