




**No. 903TP & No. 904
Tamper-Resistant Bait Station
BAIT HOLDER ROD
INSTALLATION INSTRUCTIONS**

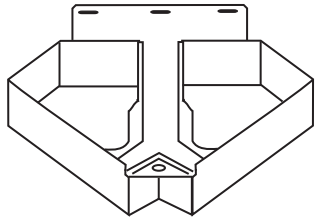


**No. 903TP/903CL
Bait Station (A)**
(with Cover Removed)

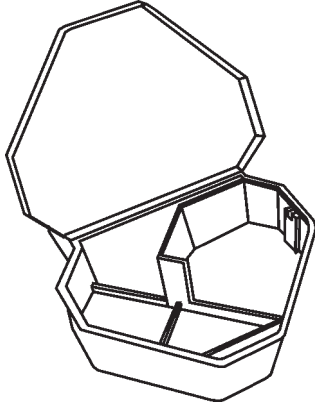

**No. 904
Bait Station (B)**

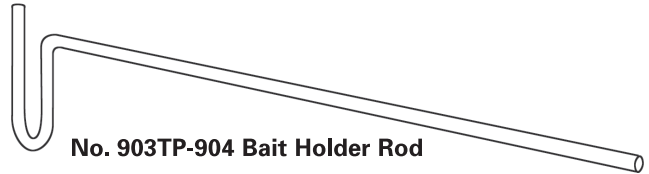


No. 903TP-904 Bait Holder Rod



No. 750
TOP GUN™
BAIT BLOCK®




No. 709-PN PEANUT BUTTER
BAIT BLOCK® OR
No. 709-AP APPLE BAIT BLOCK®



No. 716-B
BAIT BLOCK® 2G
Second Generation
Rodenticide™




No. 716-S NECTUS™
SOFT BAIT 2G
Second Generation
Rodenticide™ Can Be
Used By Inserting Bait
Holder Rod Through Packet Edge

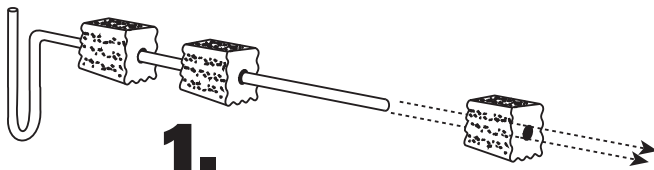

1.


Insert bait rod through hole in any
JT EATON™ BAIT BLOCK®.
All BAIT BLOCKS® provide excellent
rodent control.

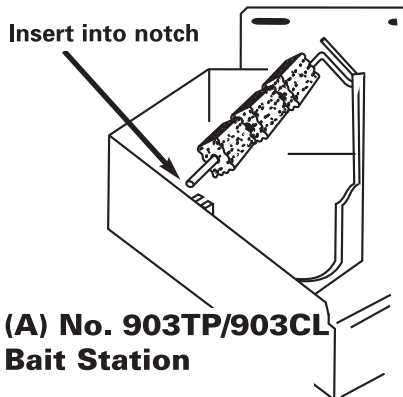


**(A) No. 903TP/903CL
Bait Station**

2.

Insert straight end of bait
rod into notch on outside
wall of JTEATON™
No. 903TP/903CL Bait Station (A)
or No. 904 Bait Station (B).

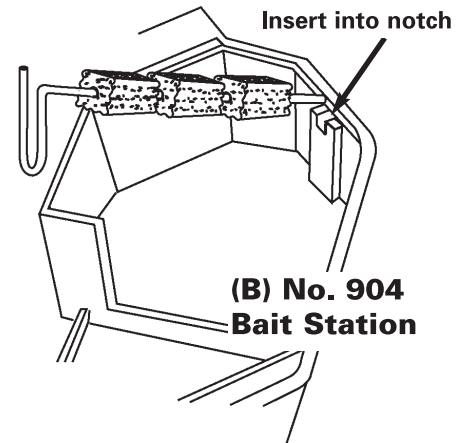

**(B) No. 904
Bait Station**

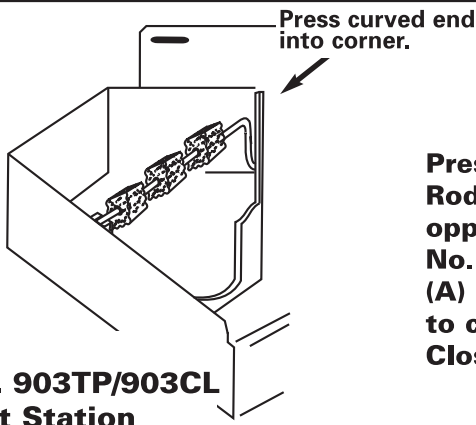


**(A)
No. 903TP/903CL
Bait Station**

3.

Press curved end of Bait
Rod into corner on side
opposite of notch on
No. 903TP/903CL Bait Station
(A) or No. 904 Bait Station (B)
to create tight fit.
Close and secure lid.

Press curved end
into corner.

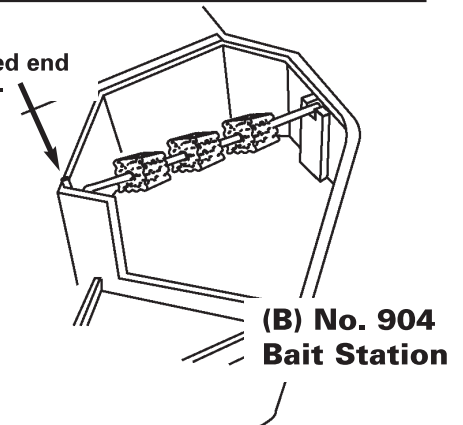

**(B) No. 904
Bait Station**